


Server Motherboard

CA-SZF-2L

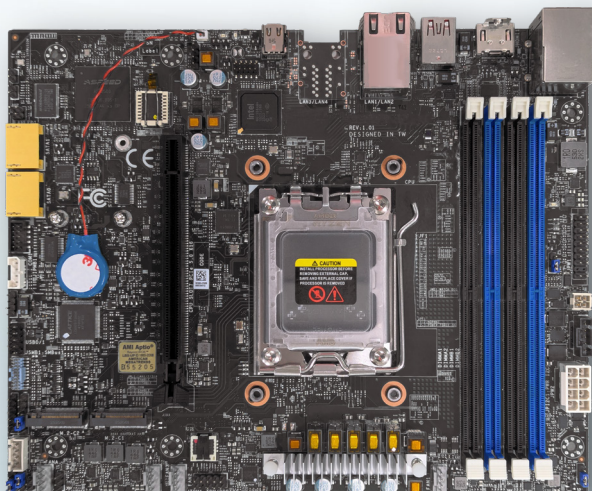

KEY FEATURES

- 9" x 7.25" FlexATX
- AMD EPYC 4005/4004 series or Ryzen 9000/7000 series processor
- DDR5 5600MT/s 192GB
- 2 x GbE LAN Ports Intel® Ethernet Controller I350

⚠ Product details and images may change without notice.

MAIN BOARD

Form Factor	FlexATX
Dimension	9" x 7.25"

PROCESSOR

CPU	AMD EPYC 4005/4004 series or Ryzen 9000/7000 series processor, socket AM5
CPU TDP	Up to 170W

SYSTEM MEMORY

Memory	1 x DDR5 up to 5600MT/s 192GB, support ECC UDIMM in 4 slot
Memory Voltage	1.1V

PCIe

Full-length Slot	1 x PCIe 5.0 x 16 slot, support x 16 or x8x8
M.2 Slot	1 x M.2 M Key (22110) PCIe 5.0 x 4 1 x M.2 M Key (2280) PCIe 5.0 x 4

CONNECTOR

Fan Connector	4 x fan header (dual cooling zone)
Power Connector	12 DC input: 8 pin (2x4) & 4 pin ATX connector

INPUT/ OUTPUT

Networking	2 x GbE LAN ports thru Intel I350-AM4 LAN chip
Video	1 x HDMI 2.1 1 x USB type C (DP) 1 x mini-DP thru AST2600
USB	2 x USB 3.2 Gen2 type A (Rear) 1 x USB 3.2 Gen1 type A (Rear) 1 x USB 3.2 Gen2 type C *(1) (Rear) 2 x USB 2.0 thru internal header *(1). The same physical USB Type C port listed in the video section supports both DisplayPort (DP) and USB 3.2 Gen 2 data transfer.
SATA	2 x SATA3 6Gb/s ports
Serial Port	1 x RS-232 header
TPM 2.0	Onboard
Management	1 x BMC via RJ45 (support CPLD remote AC on/off, remote clear CMOS) IPMI 2.0 w/dedicated LAN

CERTIFICATIONS

CE/FCC Class B

Compuware Technology Inc.

Tel: 886-2-8226-3936 Address: 5F., No. 232, Liancheng Rd., Zhonghe Dist., New Taipei City 235, Taiwan (R.O.C.)



www.compuware-us.com