

CDR-2721-2M1

2700W CRPS Power Supply AC/DC Dual-input Redundant




FEATURES

- High Efficiency: 96%
- Hot Swappable
- PMBus Support
- Full Digital Power Supply
- Smart Fan Speed Control
- Active Power Factor Correction
- In-system Firmware Upload



■ Dimension : 185 x 73.5 x 40 mm (D x W x H)

⚠ Product details and image are for reference and final product is subject to change without notice.

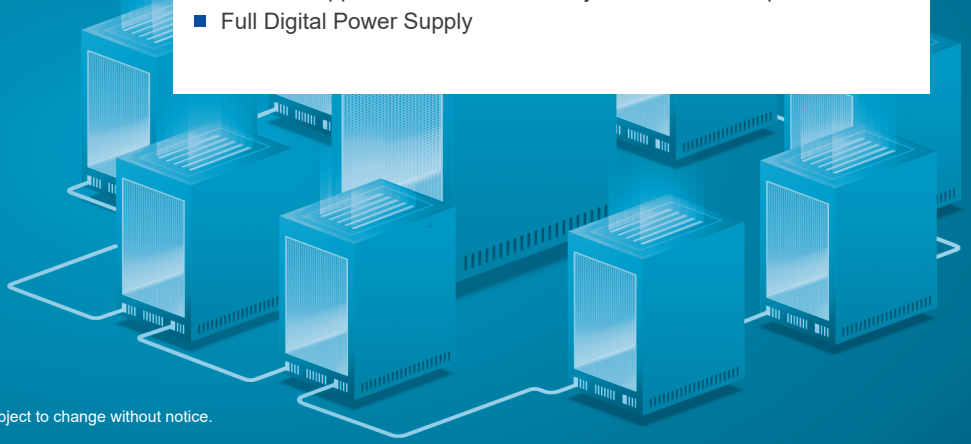

SPECIFICATIONS

▶ INPUT

Voltage	AC input: 180 - 264Vac DC input: 180 - 300Vdc
Frequency	47-63Hz
Current	

▶ EFFICIENCY, PFC, THD

Load (%)	Input 230Vac		
	Input current THD	Power Factor	Efficiency
20%	15%	0.96	94%
50%	5%	0.98	96%
100%	5%	0.99	91%

▶ OUTPUT

Parameter	12V	12Vsb
Max Load	225A	4.0A
Regulation	±5%	±5%
Ripple & Noise	120mVp-p	120mVp-p

▶ PROTECTION, RELIABILITY, WARRANTY

Over Current Protection (OCP)
Over Power Protection (OPP)
Over Voltage Protection (OVP)
Over Temperature Protection (OTP)
Holdup Time: 11.2msec @ 70% Load
MTBF: >400,000 hours @ 30 °C
Warranty: 3 Years

▶ ENVIRONMENTAL

Temperature	Operating : 0 to 55°C Non-operating : -40 to 70°C
Altitude	Operating: to 16,500 feet (5,000 meters)
Relative Humidity	Operating: to 85% RH, Non-condensing Storage: 5% to 95% RH, Non-condensing


SAFETY AND COMPLIANCE

UL, cUL, CE, CCC, CB, FCC class A, CISPR Class A, BSMI, RoHS

CDR-2721-2M1



MECHANICAL DRAWING

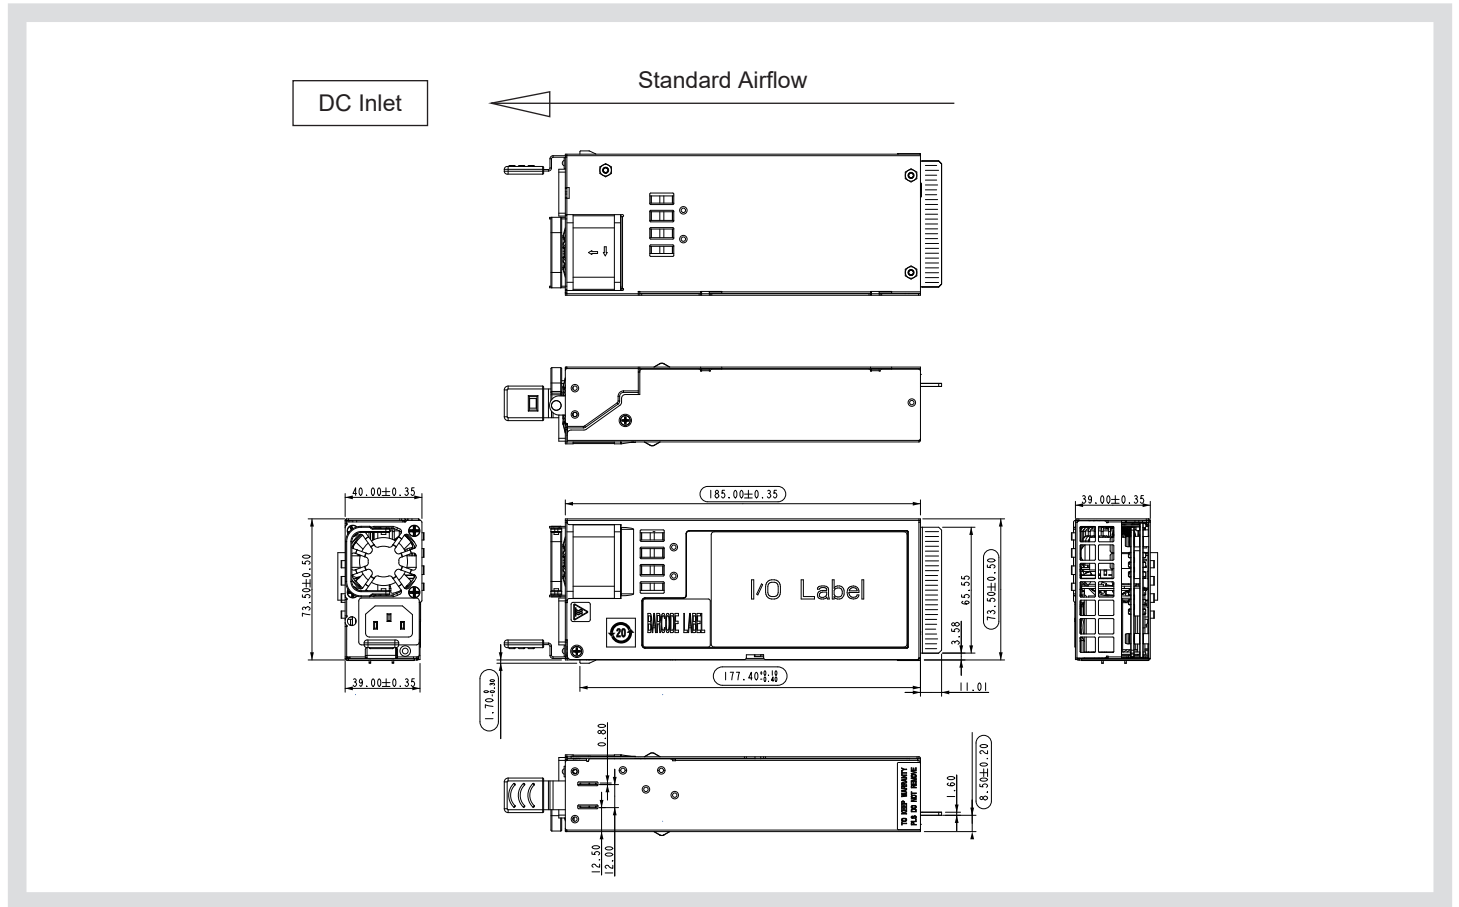

CONNECTORS

AC Inlet	IEC 320 C-20, 16A / 250Vac
DC Output	Gold Finger
DC Output Mating	Amphenol model HPG12P14SRT153T

OUTPUT CONNECTOR PIN ASSIGNMENTS

PIN#	Signal Name	PIN#	Signal Name	PIN#	Signal Name	PIN#	Signal Name	PIN#	Signal Name	PIN#	Signal Name
A1	GND	A10	+12V	A19	PMBus SDA	B1	GND	B10	+12V	B19	A0(SMBus address)
A2	GND	A11	+12V	A20	PMBus SCL	B2	GND	B11	+12V	B20	A1(SMBus address)
A3	GND	A12	+12V	A21	PSON#	B3	GND	B12	+12V	B21	+12Vstby
A4	GND	A13	+12V	A22	SMBAlert#	B4	GND	B13	+12V	B22	Cold Redundancy Bus
A5	GND	A14	+12V	A23	Return Sense	B5	GND	B14	+12V	B23	12V load share bus (Vshare)
A6	GND	A15	+12V	A24	+12V remote sense	B6	GND	B15	+12V	B24	Present (connect to ground)
A7	GND	A16	+12V	A25	PWOK	B7	GND	B16	+12V	B25	No connect
A8	GND	A17	+12V			B8	GND	B17	+12V		
A9	GND	A18	+12V			B9	GND	B18	+12V		



Compuware Technology Inc.

Tel: 886-2-8226-3936 Address: 5F., No. 232, Liancheng Rd., Zhonghe Dist., New Taipei City 235, Taiwan (R.O.C.)



www.compuware-us.com